
	Twister® Pro WIRE CONNECTOR	MODEL 344®
---	--	-------------------

FEATURES/BENEFITS:

	<ul style="list-style-type: none"> • SUREGRIP™ OVERMOLDING PROVIDES IMPROVED LEVERAGE, MORE TORQUE, AND FASTER CONNECTIONS • COMFORTABLE SWEPT WINGS EASE HAND FATIGUE • EXPANDING SQUARE-WIRE SPRING PROVIDES A SECURE CONNECTION EVERY TIME • TOUGH, UL 94V-2 FLAME-RETARDANT SHELL RATED AT 105°C (221°F)
---	--

ELECTRICAL:

VOLTAGE:
 GENERAL: 600 V MAX*
 *1000V MAX IN FIXTURES AND SIGNS

PHYSICAL:

HOUSING: THERMOPLASTIC POLYPROPYLENE WITH THERMOPLASTIC ELASTOMER INSERT: STEEL PLATING: ZINC TEMPERATURE: 105° C (221° F)	STANDARDS & SPECIFICATIONS: UL 486 C UL 94V-2 FLAME RETARDANT SHELL CSA CERTIFIED TO C22.2 No. 188-18 RoHS COMPLIANT
--	--




WIRE RANGE & COMBINATIONS: - Solid and/or stranded wire combinations unless stated otherwise
 - Consult website for other combinations not listed

STRIP LENGTH: 1/2" (13 mm)

1 #6	1 #10 w/2 #12 w/1 to 3 #16	2 #12 w/1 to 4 #18, #16 or #14	2 #16 w/1 #18 w/1 to 3 #22
1 to 2 #8	1 #10 w/2 #12 w/1 to 3 #18	3 #12 w/1 to 3 #18, #16 or #14	2 #16 w/1 #18 w/1 to 3 #20
1 to 4 #10	1 #10 w/2 #12 w/1 to 2 #14	3 #12 w/1 #16 w/1 to 2 #18	2 #16 w/1 to 4 #20, #22 or #18
1 to 5 #12	1 #10 w/3 #12 w/1 #14	3 #12 w/1 #14 w/1 to 2 #18	3 #16 w/1 to 3 #22, #20 or #18
1 to 6 #14, #16	2 #10 w/1 to 4 #18 or #16	3 #12 w/1 #14 w/1 to 2 #16	3 #16 w/1 to 2 #22 w/1 #20
2 to 6 #18	2 #10 w/1 to 3 #14 or #12	3 #12 w/2 #14 w/1 #16	3 #16 w/1 #18 w/1 to 2 #22
3 to 6 #20	2 #10 w/1 #16 w/1 to 3 #18	4 #12 w/1 to 2 #16	3 #16 w/1 #18 w/1 to 2 #20
4 to 6 #22	2 #10 w/2 #14 w/1 to 2 #16	4 #12 w/1 #14	4 #16 w/1 to 2 #22, #20 or #18
1 #6 w/1 to 2 #12	2 #10 w/1 #12 w/1 to 3 #16	4 #12 w/1 #16 w/1 #18	4 #16 w/1 #22 w/1 #20
1 #6 w/1 #10	2 #10 w/1 #12 w/1 to 2 #14	4 #12 w/1 #14 w/1 #18 or #16	4 #16 w/1 #18 w/1 #22
1 #6 w/2 #14 w/1 to 2 #16	2 #10 w/2 #12 w/1 to 2 #18	1 #14 w/1 to 5 #22 or #20	4 #16 w/1 #18 w/1 #20
1 #6 w/1 #12 w/1 to 2 #14	2 #10 w/2 #12 w/1 to 2 #16	1 #14 w/1 to 5 #18 or #16	5 #16 w/1 #22, #20 or #18
1 #6 w/2 #12 w/1 #18	2 #10 w/2 #12 w/1 #14	1 #14 w/1 #16 w/1 to 3 #18	1 #18 w/1 to 5 #22 or #20
1 #6 w/1 #10 w/1 #14	3 #10 w/1 to 3 #18	2 #14 w/1 #16 w/1 to 3 #18	1 #20 w/1 #22 w/1 to 3 #18
1 #8 w/1 to 5 #16	3 #10 w/1 to 3 #16	2 #14 w/1 to 4 #22 or #20	1 #20 w/2 #22 w/1 to 3 #18
1 #8 w/1 to 4 #14	3 #10 w/1 to 2 #14	2 #14 w/1 to 4 #18 or #16	2 #20 w/1 #22 w/1 to 3 #18
1 #8 w/1 to 3 #12	3 #10 w/1 #12	3 #14 w/1 to 3 #22 or #20	2 #18 w/1 to 4 #22, #20
1 #8 w/2 #12 w/1 to 2 #14	3 #10 w/1 #16 w/1 to 2 #18	3 #14 w/1 to 3 #18 or #16	3 #18 w/1 to 3 #22 or #20
1 #8 w/1 to 2 #10	3 #10 w/1 #14 w/1 to 2 #18	3 #14 w/1 #16 w/1 to 2 #18	4 #18 w/1 to 2 #22 or #20
1 #8 w/1 #10 w/1 to 2 #14, #12	3 #10 w/1 #14 w/1 #16	4 #14 w/1 to 2 #22	5 #18 w/1 #22 or #20
1 #8 w/2 #10 w/1 #14	3 #10 w/1 #12 w/1 #18	4 #14 w/1 to 2 #20, #18 or #16	1 #20 w/2 to 5 #22
1 #10 w/1 to 5 #18, #16 or #14	3 #10 w/1 #12 w/1 #16	4 #14 w/1 #16 w/1 #18	2 #20 w/1 to 4 #22
1 #10 w/1 or 4 #12	1 #12 w/1 to 5 #18, #16 or #14	5 #14 w/1 #18 or #16	3 #20 w/1 to 3 #22
1 #10 w/1 #16 w/1 to 4 #18	1 #12 w/1 #16 w/1 to 3 #18	1 #16 w/1 to 5 #22, #20 or #18	4 #20 w/1 to 2 #22
1 #10 w/1 #14 w/1 to 4 #16 or #18	1 #12 w/1 #14 w/1 to 3 #18	1 #16 w/1 #20 w/1 to 2 #22	5 #20 w/1 #22
1 #10 w/2 #14 w/1 to 3 #16	1 to 2 #12 w/1 #14 w/1 to 3 #16	1 #16 w/2 #20 w/1 to 2 #22	
1 #10 w/1 #12 w/1 to 4 #14	1 #12 w/2 #14 w/1 to 2 #16	1 #16 w/1 #18 w/1 to 3 #22	
1 #10 w/1 #12 w/1 to 4 #16 or #18	2 #12 w/1 #14 w/1 to 3 #18	1 #16 w/1 #18 w/1 to 3 #20	
	2 #12 w/1 #16 w/1 to 3 #18	2 #16 w/1 #20 w/1 to 2 #22	
	2 #12 w/2 #14 w/1 to 2 #16	2 #16 w/2 #20 w/1 to 2 #22	

DIMENSIONS:

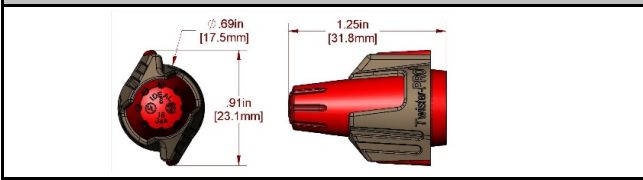

ORDERING INFORMATION:

QUANTITY	CAT. NO.	WEIGHT (lbs)
BOX OF 50	30-144	0.5
JAR OF 250	30-244J	2.1
JAR OF 500	30-644J	4.3
BARREL OF 20,000	30-944	154

FACTORY CONTACT:

IDEAL INDUSTRIES, INC.
 1800 S. PRAIRIE
 SYCAMORE, IL 60178 P: (800) 435-0705
 E: contactus@idealindustries.com
 W: idealind.com

SALES CONTACT:

Revised: September 2024