

# Vision120™

## 90+ CRI Flexible LED Tape Wet Location Standard Output

### PRODUCT OVERVIEW

A standard output, wet location flexible 120V plug-in or hardwire LED linear tape for architectural coves, indoor steps, bannisters, exterior recesses and other constructs where even, energy saving LED illumination is specified. 5 year warranty. Do not submerge. **Factory cut only - cutting in field will void ETL label and warranty.**



**NOTE:** Each run requires power connector (see Connectors and Accessories next page).



CUTTABLE EVERY 4"

### FEATURES

- 120V operation (no power supply required)
- Wet location - IP65
- Cord and plug or hardwire power connector (replaceable fuse protected)
- Tape encased in UV inhibiting water resistant clear poly flexible sheath
- Dimmable (ELV/Triac - Lutron - Skylark - Selv-300P)
- 2700K, 3000K, 4000K, Red, Green, Blue, Amber
- 120° viewing angle
- Configured by factory in 4 inch increments
- Maximum run: 163 feet
- Mounting options: Clips or PVC / aluminum channel
- Frosted lens and channel covers available (see below)

### SPECIFICATIONS

#### ELECTRICAL

- 120V
- 2.0 watts per foot

#### OPTICS

- 90+ CRI

#### LUMENS

- 27K (140lm/ft), 30K (150lm/ft), 40K (160lm/ft)

#### OPERATING TEMP

- -4 to 122°F (-20 to +50°C)

#### LABEL

- IP65
- ETL

#### WARRANTY

- 5 years
- Do not install in an application that is not easily accessed for service.

### HOW TO SPECIFY VISION120 AND CREATE A CATALOG NUMBER


#### Standard Output (163' Max.)

Specify by the foot / inches - **minimum cut is 4"**.

Example: To order an 8'-4" length of 2700K tape, specify: **V120-SO-27-8-4**

Example: To order a 24' length of 3000K tape, specify: **V120-SO-30-24**

Example: To order a 120'-8" length of 4000K tape, specify: **V120-SO-40-120-8**

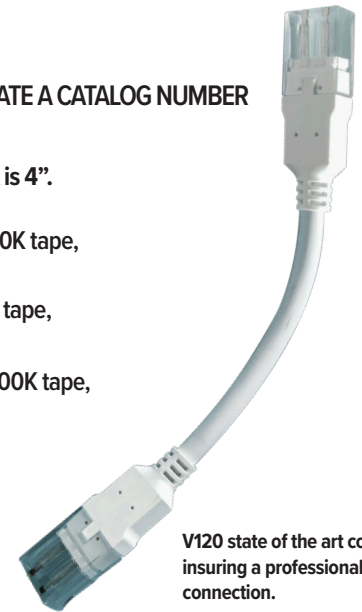

**V120 state of the art connectors insuring a professional connection.**

